

# KOMATSU

## GD955-7R



Photos may show equipments not available in your area

Motor grader

**Engine power**  
318 kW / 426 HP @ 1900 rpm

**Operating weight**  
47320 kg

**Blade length**  
5.5 m (6.1 m optional)

# Walk-around

## Productivity features

- Productivity increased by enlarging machine size and increasing machine weight to match full 5.5 m specification with high power

## Maintenance features

- Bearing type circle to greatly reduce downtime
- Easy access to service areas
- Maintenance information display
- Long oil change intervals

## Safety features

- Built-in ROPS (ISO 3471) / FOPS (ISO 3449) cab
- Engine shutdown secondary switch
- KomVision

## Durability features

- Main structure completely redesigned for mining, reducing lifecycle costs with over 30% longer durability life

## Operator environment features

- Electrical fingertip control
- Steering wheel and steering lever for easy and safety operation
- Cab design for wide view and operator comfort



*Increased production [ $m^2/h$ ]  
(Compared with GD825A-2)*



Engine power

**318 kW / 426 HP @ 1900 rpm**

Operating weight

**47320 kg**

Blade length

**5.5 m (6.1 m optional)**



## Exceptional workability and **maintainability**

### Control features

- Auto-manual selectable lockup torque converter transmission
- Articulate auto center return system to return to neutral with one switch

### ICT & Komtrax\*

- Machine monitor with improved operator interface
- Komtrax Plus

### Ecology features

- Engine power mode selection system
- Komatsu U.S. EPA Tier 2 emission certified engine



\* Information and Communication Technology

# Productivity features



## High productivity

GD955-7R can grade 33% more area per hour than GD825A-2 with standard 5.5 m blade. Extended blade width and 48% higher engine output for increased working speed enable more efficient operation which is required in mining operation. Optional 6.1 m blade provides more working width in easy operation and keeps working speed by using aggressive blade angle in heavy grading.

## Blade stability

Thanks to 50% operating weight heavier than GD825A-2, GD955-7R can more easily grade hard packed road surface. In addition, expanded tread and increased weight on axles keep work stable in various condition. A long wheel base allows the operator to obtain an aggressive moldboard angle. This wide blade angle permits material to roll more freely along the blade, which reduces power requirements.

## Easy to operate

Although GD955-7R has long wheel base geometry common to Komatsu graders, it can turn sharply with wide steering angle and articulate angle. GD955-7R can turn on 24 m width road without cutting of the wheel, and has wider working range thanks to extended blade width and wide articulate angle.

### Production [m<sup>2</sup>/h]

## 33% up (P mode)

(Compared with GD825A-2)

\* Production varies depending on the job conditions.





### Work equipment

#### Moldboard



5.5 m moldboard is standard for GD955-7R. Optional 6.1 m moldboard is available for boosting up haul road maintenance especially for soft rock mine sites.

#### Ripper

Ripper beam and link are strengthened according to the increased machine size. Number of shanks ranges from 3 as standard to 7.




# Maintenance features

	Bearing type (GD955-7R)	Guide hanging type (GD825A-2)
		
Greasing	Automatic greasing	Every 50 h
Play adjustment	Unnecessary	Every 500 h
Part replacement	Bearing, 16000 h	Wear plate, circle guide Replace when worn to 2 mm or less

## Bearing type circle to greatly reduce downtime

With the bearing type circle, "Circle play adjustment" is unnecessary which has occupied a large part of downtime. In addition, the work equipment maintenance time is greatly decreased and the maintenance cost is reduced largely since the automatic greasing system is installed as standard.

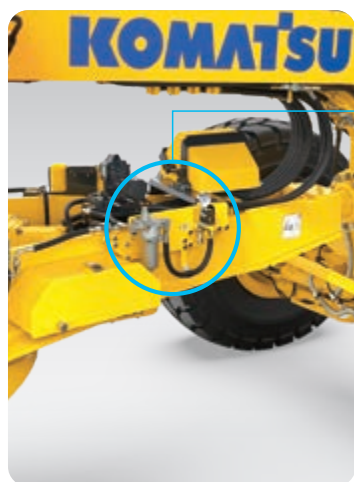

Refill port

## Automatic greasing system

This system automatically supplies grease to each greasing point every preset hours, and it is not necessary to periodically lubricate by a manual pump. Refill port to the reservoir is accessible from the ground level.


## Adjustable blade rail guide

Play in the blade rail guide must be adjusted to maintain precise blade control. In GD955-7R, no shims are used and the play can be adjusted easily in a short time with the adjustment bolt.



## Easy access to service areas

- Large hinged lockable doors are standard and provide easy access to the engine and radiator service points. Spin-on filters can be changed quickly.
- Circuits and fuse sizes are clearly identified in the fuse panel located in the cab.
- The tandem oil check point is conveniently located at the end of the tandem.
- Refueling from the ground is easy.
- Engine oil, hydraulic oil and coolant drains are positioned for easy maintenance.
- The tandem axle step is provided with a punched metal foot plate to ensure stable footing during maintenance and inspection.

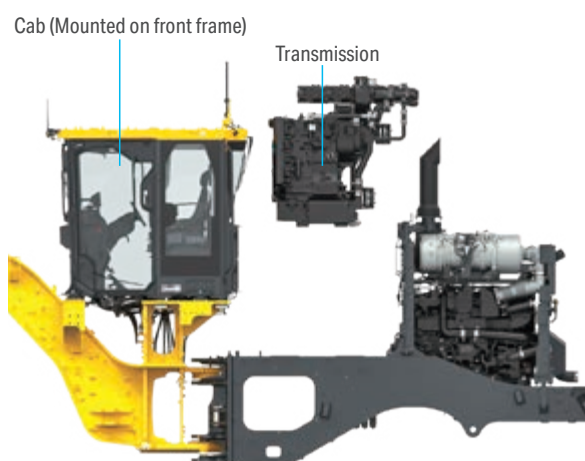


## Easy component removal

The transmission can be removed without removing the cab since the cab is mounted on the front frame. Service downtime is reduced since the transmission is removed easily.



## Ground level battery disconnect switch

For convenience in maintenance / service, a battery disconnect switch is located on the left side of the vehicle, and accessible from the ground level.

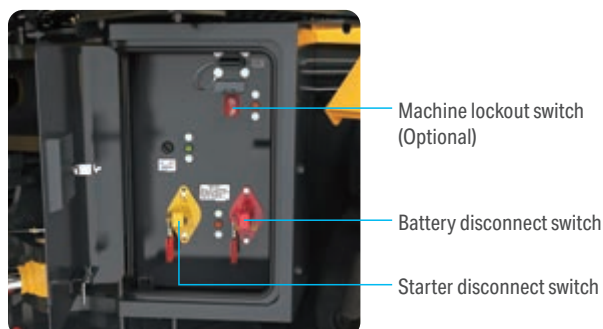

## Ground level emergency stop switch

For convenience in maintenance / service, four emergency engine stop switches are located on the vehicle, and accessible from the ground level.



## Electric circuit breaker

Circuit breakers are used for important electric circuits that need to be restored quickly if a problem occurs in the electrical system.



## Tie-off anchor points for maintenance

Anchors mounted to ROPS (ISO 3471) frame roof provide secure locations for attaching fall protection harnesses.

## Machine lockout (Optional)

Machine lockout switch invalidates steering cylinders, operation of blade and ripper work equipment and machine moving forward or backward when engine is ON.


## Centralized arrangement of filters

The filters are centralized for easy service.



## Service center

A ground level service center is located in front of rear tire on the right side. Engine oil, transmission oil, hydraulic oil, and coolant refilling ports are accessible in one location for quick preventative maintenance servicing.

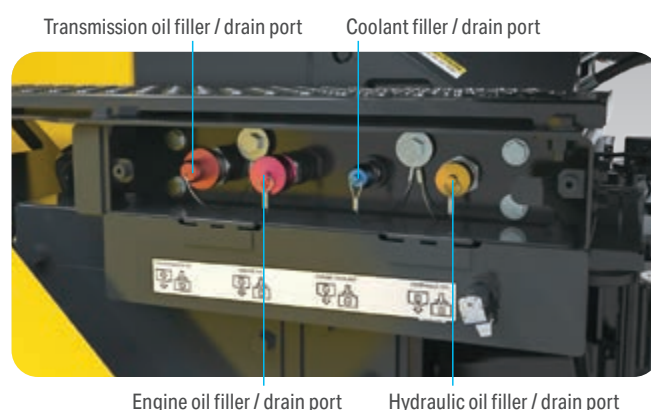

# Maintenance features

## Long oil change intervals

Long oil change intervals minimize operating cost.

- Engine oil 500 hours
- Hydraulic oil 2000 hours
- Transmission oil 1000 hours

## "Maintenance time caution lamp" display


When the remaining time to maintenance becomes less than 30 hours\*, the maintenance time monitor appears. Pressing the menu switch the monitor to the maintenance screen.

\* The setting can be changed within the range between 10 and 200 hours.



## Reversible fan

The radiator fan is hydraulically driven and reversible. The fan reverse mode can be controlled by use of the monitor.



Fan reverse indicator



# Durability features

## Durability

The front frame and rear frame of GD955-7R keep their performance and durability for a long time even in severe work.



### Front frame structure

The frame is strong against bending and twisting due to large section structure with high tension steel plates, simplified structure, and optimum plate thickness. The durability life is twice as long as before.

### Rear frame structure

The frame is light in weight and high in durability due to "C-section structure" with high tension steel plates. Maintainability is greatly improved compared with the current models by optimizing the power line layout.



# Operator environment features



## Cab and control system

From our experience of motor grader development, we believe that industrial standard lever pattern will provides the operator most precise operation. So that our new control system keeps same approach, but expand comfort with the fingertip control levers next to the operator seat. And the GD955-7R still has steering wheel, this is based on the customer feedback, who emphasize safety on road-going equipment.





## Less effort

New control system reduces the movement of arm and relieves stress, owing to ergonomic console layout. The cab also has more room behind the seat, gives more adjustment capability of the backward of the seat.

### Movement of arm

Reduce up to **92%**

### Stress during operation

Reduce up to **10%**

Typical test data at Komatsu test center



## Fingertip control

Short lever throws and low effort in both directions allows the operator to use multiple controls with one hand.



## Steering wheel and steering lever

For more safer traveling, we have steering wheel. While working, steering lever on the left console enables the operator to steer the machine and control work equipment without changing arm position.

# Operator environment features




## Visibility

Excellent visibility from the hexagonal cab and layout of the rear side pillars boost operator confidence and productivity in all grader applications. Well-positioned blade linkage provides an unobstructed view of the moldboard and front tires.



## Rear view monitor system

The operator can view the rear of the machine with a full color monitor that is located above the windshield. Visual guidelines can also be added for additional convenience.

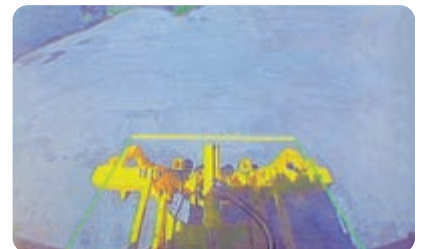



## Low noise

New hydraulically driven fan and redesigned layout of the cooling system provide a low noise level.

Operator's ear dynamic noise level (ISO 6396)

# 75 dB(A)

Circumference dynamic noise level (ISO 6395)

# 109 dB(A)

Typical test data at Komatsu test center

## Work equipment lock switch

The operator can lock working lever function with the electrical switch.

## Seat belt warning indicator

A warning indicator on the monitor appears when the seat belt is not fastened.

## Air Conditioner (A/C)

Well-positioned air conditioning vents keep the cab temperature comfortable regardless of weather conditions.

## Adjustable tilt / telescopic steering wheel

The steering wheel also has flip-up function, ensures easy entry and exit from the cab.



## Suspension seat

The air suspension, fabric covered seat which is adjustable to the operator's weight is provided as standard. The suspension seat dampens vibrations transmitted from the machine and reduces operator fatigue.



## Power console height adjustment

The control lever console can be adjusted only with one push of a button. The console also has manual forward-backward adjustment.




## Self-canceling turn signals


By turning the steering wheel back to the straight, the turn signal goes off and the lever back to its original position.

## Standard equipment


Lunch box tray




Engine shutdown secondary switch



24 V and 2 x 12 V power outlet



Magazine box



Mobile phone tray



Multifunction audio



# Control features

## Lockup torque converter transmission

The GD955-7R features dual mode transmission for pursuing ease of operation. This unique system provides both efficiency of direct drive and controllability of torque converter drive. With this outstanding power transmitting system, the GD955-7R delivers advanced productivity in any applications from fine grading to heavy grading.




## Shift Lever and F-N-R switch

The GD955-7R offers finger control shift lever and F-N-R switch near the right control levers. The operator can easily shift the gear and set direction during work equipment control.

### Gearshift preset function

F-N-R switch can set initial shift position to start, which reduces frequent shift lever operation during shuttle shifting.

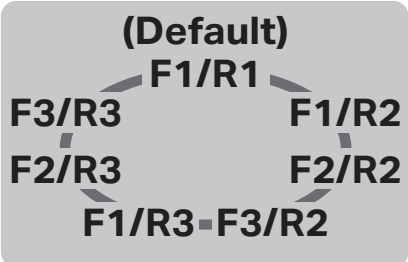

## Transmission mode selection

There is two transmission mode to enhance productivity. With only one push of a button, transmission mode is selected to fit in working condition and preference of operators.

### Auto mode

Drive with torque converter in all shift position. This mode maximizes torque converter benefits. Lockup will works in F3-F8 and R4-R8 position. Shifting F8 position serves automatic shifting through F3-F8 in responsible to machine speed.

### Manual mode

Works like a same way as conventional power shift, by engaging lockup clutch with all gears. This mode maximizes efficiency of direct shifting. In reverse travelling, works same way as Auto mode, serves less shift lever operation frequency.

		Shift lever position																
		F1	F2	F3	F4	F5	F6	F7	F8	R1	R2	R3	R4	R5	R6	R7	R8	
Auto mode		○	○	◎						○	○	○	○					Auto mode & Manual mode
				◎—○									◎—○					
				◎—○—○									◎—○—○					
				◎—○—○—○									◎—○—○—○					
				◎—○—○—○—○									◎—○—○—○—○					
				◎—○—○—○—○—○									◎—○—○—○—○—○					
Manual mode		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Auto mode & Manual mode

○ : In torque converter state


◎ : As the machine speed increases, torque converter state changes to lockup state

● : In lockup state (Torque converter is not in use)



## Anti stall

Prevents engine stalling while in manual mode by automatically disengaging the lockup clutch and shifting to torque converter mode. The torque converter absorbs the load allowing the machine to keep moving and not stall or stop.

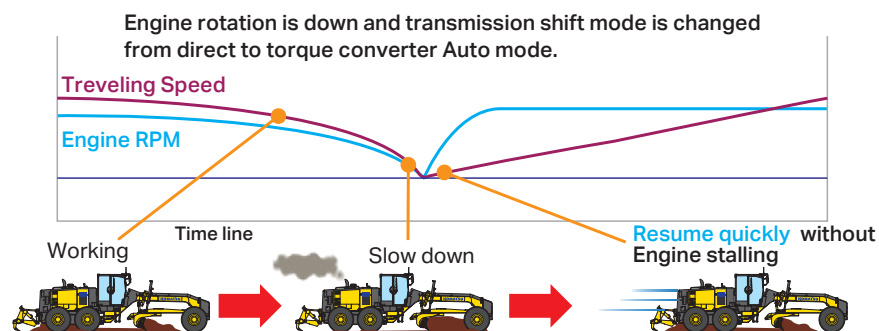


## Power train protection

Electronic over-speed protection prevents downshifting until reducing the travel speed to the safe range of shift changing. FR Inhibitor restricts excessive shuttle shifting at high traveling speed.

When the inching clutch is used, if the travel speed is reduced by the automatic downshift function in the inching mode, the gear speed is automatically lowered to prevent an engine stall and clutch seizure.

## Articulate auto center return system

It is difficult for the operator to directly see the articulate neutral position, but the operator can return the articulate position to neutral with one switch. With this system, combined operations with steering etc. are reduced and the controllability during the work is improved.

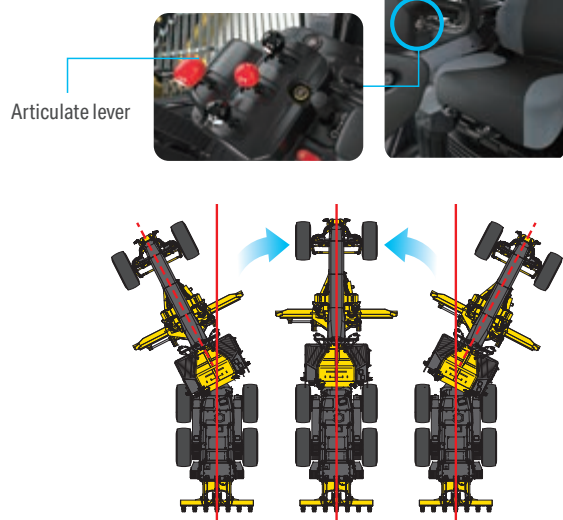

## Reduce shift shock for driving comfort

Torque converter allows to absorb torque fluctuation of the engine. Even in shifting the gear during lockup, torque converter temporarily absorb shift shock and contributes high driving comfort.


## Electric throttle control

An RPM set switch allows the operator to perfectly match ground speed to working conditions. The switch has three positions, auto, off, and manual. When the engine speed is set and the switch is positioned in Auto, the brake or acceleration pedal will temporarily override the RPM set point.


## Automatic differential lock

The automatic differential lock / unlock selection mode is installed which works according to the steering angle. The operator does not need to operate the switch each time the straight travel and turning are changed between them.

### During turning

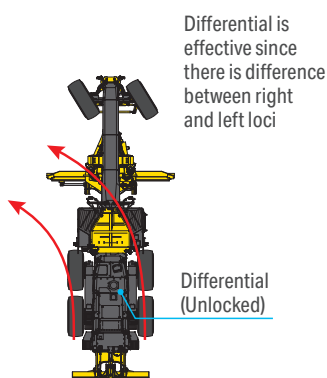

### During straight travel

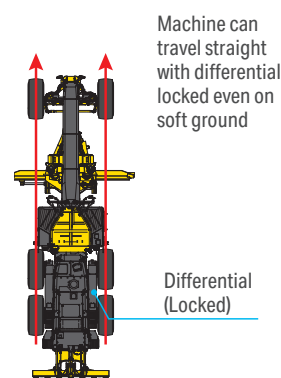





## Engine power mode selection system

The system allows the operator to select from the three mode, <P mode> or <E mode> or <Middle speed mode>, according to the working conditions. The selector switch which is on the console is easy to access.

### P mode

Maximize production by taking full advantage of engine output. Appropriate for job sites which emphasize productivity.

### E mode

Suited for carrying out lighter work economically. This feature provides the sufficient power, better fuel consumption, and prevents tire slipping to extend tire life.

### Middle speed mode

The operator can finely change the travel speed while working at full throttle since the intermediate gear speeds (F2.5, F3.5) are provided by controlling the engine. With this, the operator can work at optimum travel speed.

	Shift range	F1	F2	F3	F4	F5	F6	F7	F8
	Selected gear	1st	2nd	3rd	4th	5th	6th	7th	8th
<b>E mode</b>	Travel speed (km/h)	5	7	9	13	16	22	34	44
<b>P mode</b>	Travel speed (km/h)	6	8	11	15	18	24	34	44

	Shift range	F1	F2	F2.5	F3	F3.5	F4	F5	F6	F7	F8
	Selected gear	1st	2nd	3rd			4th	5th	6th	7th	8th
	Engine rpm limit			●		●					
<b>Middle speed mode</b>	Travel speed (km/h)	6	8	9	11	12	15	18	24	34	44

Travel speeds calculated with 26.5R25 L3 tires at full accelerator and hard flat road



# Information and Communication

## Machine monitor

The machine monitor display various machine information and allows for various settings of the machine. The Liquid Crystal Display (LCD) monitor is a 7-inch color and displays maintenance information, operation record, ECO guidance record, etc. The switch panel is used to select various screens. By using the switch panel, you can display various user menus on the LCD screen and adjust the machine settings.

### Visual user menu

Pressing the menu switch on the switch panel displays the user menu screen. The menus are grouped by their functions. Easy-to-understand icons enable intuitive use.



### ECO guidance

In order to optimum operation, the following 4 guidance messages are displayed for fuel saving operation

- 1) Excessive engine idling event
- 2) Excessive stepping on accelerator event
- 3) Recommendation of release acceleration at direction change.
- 4) Recommendation of shift up.

### Machine monitor with troubleshooting function to minimize downtime



Various meters, gauges and warning functions are centrally arranged on the machine monitor. The monitor simplifies startup inspection and promptly warns the operator with a lamp and buzzer if any abnormalities should occur. In addition, countermeasures are indicated in 4 levels to ensure safety and help prevent the machine from having major problems. Replacement times for oil and filters are also indicated.

### ECO gauge

In order to help the operator to perform in an environmentally friendly way and minimize energy consumption, an easy-to-read "ECO gauge" is displayed on the machine monitor screen.

### Operation record, fuel consumption history, and ECO guidance record

The ECO guidance menu enables the operator to check the operation record, fuel consumption history and ECO guidance record from the ECO guidance menu, using a single touch, thus enabling the total fuel consumption to be reduced.

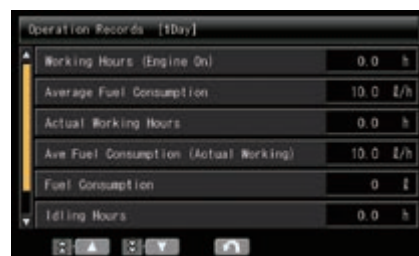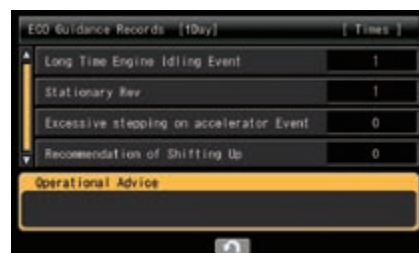



# Safety features

## Built-in ROPS / FOPS cab

Operator cab structure conforms to ISO 3471 ROPS standard, and ISO 3449 FOPS Level II standard.



## Secondary engine shutdown switch

A secondary engine shutdown switch is located in the cab for abnormal use.

## Rear entry access platform (Optional)

The rear entry access platform provides safety and easy access / egress to / from the cab.



Route of getting on



\* Standard specification

## KomVision with radars

The 5-camera and 5-radar system provides the bird's-eye view of around the vehicle with the KomVision monitor and an additional rear view monitor to operator. Object detection by radar is helpful when moving near other vehicles. If an object is detected in the area, a small circle is displayed on the monitor screen and system informs the operator by an alarm sound.



## Three-point seat belt (Optional)

A three-point operator seat belt is available as an option with heated and ventilated air suspension seat. This is made possible by changing operating position with electric control levers. It can also be used as conventional two-point seat belt depending on the work application.

## Full LED lighting

Standard 14 LED working lamps improve safety and efficiency during night shift. Convenient LED access lamp and service lamp contribute to safety. All other roading lamps are also changed to LED type to reduce service bulb replacement.



# KOMTRAX

## What

- Komtrax is Komatsu's remote equipment monitoring and management system
- Komtrax is standard equipment on all Komatsu construction products
- Komtrax continuously monitors and records machine health and operational data
- Information such as fuel consumption, utilisation, and a detailed history aids in making repair or replacement decisions

## Where


- Komtrax data can be accessed virtually anywhere through your computer, the web or your smart phone
- Automatic alerts keep fleet managers up to date on the latest machine notifications

## When

- Know when your machines are running or idling and make decisions that will improve your fleet utilisation
- Detailed movement records ensure you know when and where your equipment is moved
- Up to date records allow you to know when maintenance was done and help you plan for future maintenance needs

## Why

- Knowledge is power - make informed decisions to manage your fleet better
- Knowing your idle time and fuel consumption will help maximise your machine efficiency
- Take control of your equipment - any time, anywhere

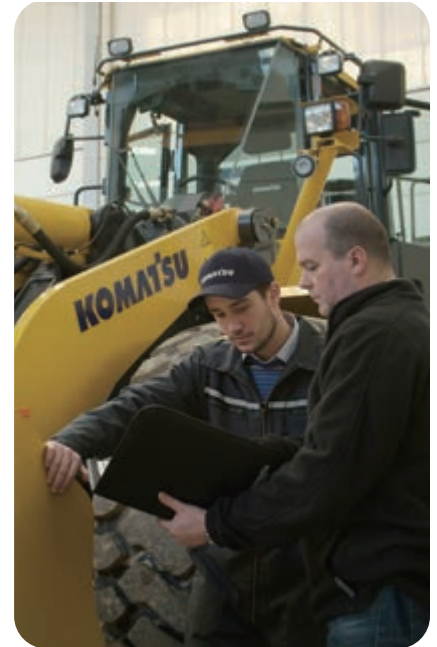

# KOMTRAX Plus

## Equipment management support

Komtrax Plus enables expanded monitoring of the fleet via satellite. Users can analyse "machine health" and performance from a remote location. This includes component condition and trend data. By making this critical information readily accessible, Komtrax Plus is an effective tool in maximising productivity and lowering operating cost.





# Support



## Komatsu total support

To keep your machine available and minimize operation cost when you need it, Komatsu Distributor is ready to provide a variety of supports before and after procuring the machine.

### Fleet recommendation

Komatsu Distributor can study the customer's job site and provide the most optimum fleet recommendation with detailed information to meet all of your application needs when you are considering to buy new machines or replace the existing ones from Komatsu.

### Product support

Komatsu Distributor gives the proactive support and secures the quality of the machinery that will be delivered.

### Parts availability

Komatsu Distributor is available for emergency inquiry by the customers for genuine, quality guaranteed Komatsu parts.

### Technical support

Komatsu product support service (Technical support) is designed to help customer. Komatsu Distributor offers a variety of effective services to show how much Komatsu is dedicated to the maintenance and support of Komatsu machine.

- Preventive Maintenance (PM) clinic
- Oil & Wear analysis program

## Repair & maintenance service

Komatsu Distributor offers quality repair and maintenance service to the customer, utilizing and promoting Komatsu developed programs.

## Komatsu Reman (Remanufactured) components

Komatsu Reman products are the result of the implementation of the Komatsu global policy which establishes and agrees to reduce the owning, operating and total Life Cycle Costs (LCC) to Komatsu's customer through high quality, prompt delivery and competitively priced in own remanufactured products (QDC).



# Specifications

## Engine

Model	Komatsu SAA6D140E-5		
Tier 2 equivalent			
Type	Water-cooled, 4-cycle, direct injection		
Aspiration	Turbocharged and air to air aftercooled		
No. of cylinders	6		
Bore	140 mm		
Stroke	165 mm		
Piston displacement	15.24 l		
Engine power (Manual mode)			
SAE J1995	318 kW 426 HP / 1900 rpm		
ISO 14396	318 kW 426 HP / 1900 rpm		
ISO 9249 (Net engine power)	311 kW 417 HP / 1900 rpm		
Maximum torque	2150 N·m / 219 kgf·m / 1350 rpm		
Torque rise	37%		
Fan speed	Max. 1300 rpm		
Air cleaner	2-stage, dry-type		

## Transmission and torque converter

Full power shift transmission with torque converter and lockup.

Gear	Forward		Reverse	
	*1	*2	*1	*2
1st	5.3 km/h	(5.7 km/h)	4.5 km/h	(4.9 km/h)
2nd	7.2 km/h	(7.8 km/h)	6.1 km/h	(6.6 km/h)
3rd	10.2 km/h	(11.0 km/h)	8.7 km/h	(9.4 km/h)
4th	13.7 km/h	(14.6 km/h)	11.7 km/h	(12.6 km/h)
5th	16.8 km/h	(17.9 km/h)	15.9 km/h	(17.0 km/h)
6th	23.0 km/h	(24.2 km/h)	21.8 km/h	(23.0 km/h)
7th	32.5 km/h	(33.7 km/h)	30.8 km/h	(32.1 km/h)
8th	43.6 km/h	(44.4 km/h)	41.4 km/h	(42.3 km/h)

\*1 Travel speeds calculated with 26.5R25 L3 tires at rated engine rpm and hard flat road

\*2 Travel speeds calculated with 26.5R25 L3 tires at full accelerator and hard flat road

## Tandem drive

Oscillating welded box section	739 mm × 296 mm
Side wall thickness	
Inner	25 mm
Outer	25 mm
Wheel axle spacing	1981 mm
Tandem oscillation, forward or reverse	15°

## Front axle

Type	Solid bar construction welded steel sections
Ground clearance at pivot	710 mm
Wheel lean angle, right or left	14°
Oscillation, total	32°

## Rear axle

Alloy steel, heat treated, semi floating axle with lock / unlock differential (Auto / manual)	
---	--

## Steering

Hydraulic power steering providing stopped engine steering meeting ISO 5010.	
Minimum turning radius	9.3 m
Maximum steering range, right or left	50°
Articulation	27°

## Brakes

Service brake	Foot operated, wet multiple-disc brakes, hydraulically actuated on four tandem wheels
Parking brake	Manually actuated, spring applied on four tandem wheels. Hydraulically released wet disc

## Frame

Front frame structure	
Height	504 mm
Width	470 mm
Side	25 / 32 mm
Upper, Lower	28 / 32 mm

## Drawbar

A-shaped, welded construction for maximum strength with a replaceable drawbar ball.

Drawbar frame	310 mm × 32 mm
---------------	----------------

## Circle

Lubricated bearing type circle; Circle and pinion require no adjustment	
Diameter (outside)	1822 mm
Circle reversing control hydraulic rotation	130°



## Moldboard

Hydraulic power shift fabricated from steel. Includes replaceable metal wear inserts, cutting edge and end bits. Cutting edge and end bits are hardened.

Dimensions	5489 mm x 960 mm x 25 mm
Arc radius	414 mm
Cutting edge	254 mm x 25 mm
Replaceable / Reversible side edges	204 mm x 490 mm x 19 mm

## Blade range

Moldboard side shift:

Right	818 mm
Left	916 mm
Maximum shoulder reach outside rear tires (frame straight)	
Right	2126 mm
Left	2119 mm
Maximum lift above ground	542 mm
Maximum cutting depth	498 mm
Blade tip angle	53° forward, 3° backward

## Hydraulics

Load-sensing closed center hydraulics with variable displacement piston pump. Short stroke / low effort direct acting control valves with preselected maximum flow setting to each function. Double acting anti-drift check valves on blade lift, tip, drawbar shift, articulation, ripper, and leaning wheels.

Output (At engine rated rpm)	315.2 l/min
Maximum system pressure	27.5 MPa / 280 kgf/cm <sup>2</sup>

## Instrument

Electric monitoring system with diagnostics:

Standard gauges

Articulation, engine coolant temperature, fuel level, speedometer, transmission shift indicator, engine tachometer, torque converter oil temperature, hydraulic oil temperature, ECO gauge

## Capacities (refilling)

Fuel tank	717 l
Cooling system	72 l
Crank case	50 l
Transmission	85 l
Final drive	56 l
Tandem housing (each)	199 l
Hydraulic system	147 l
Circle reverse housing	27.5 l

## Operating weight (Approximate)

Includes lubricants, coolant, full fuel tank, 5.5 m blade, L3 tire, ripper (3 shanks), pusher

Total	46740 kg
On front wheels	13800 kg
On rear wheels	32940 kg

Includes lubricants, coolant, full fuel tank, 6.1 m blade, L4 tire, ripper (5 shank), pusher

Total	47990 kg
On front wheels	14070 kg
On rear wheels	33920 kg


## Ripper

Ripping depth, maximum	537 mm
Ripper shank holders	7
Ripper shank holder spacing	501 mm
Penetration force	232 kN
Pryout force	242 kN

# Specifications


## Machine dimensions

A	Height (Without antenna)	3990 mm
B	Center of front axle to counterweight (Pusher)	970 mm
C	Cutting edge to center of front axle	3160 mm
D	Wheelbase to center of tandem	8330 mm
E	Tandem wheelbase	1980 mm
F	Center of tandem to back of ripper	3400 mm
G	Overall length	13200 mm
H	Counterweight (Pusher) to ripper base bracket rear end	11860 mm
I	Tread (Front)	3005 mm
J	Width of standard moldboard	5490 mm
K	Tread (Rear)	3005 mm
L	Width over tires	3685 mm
M	Ripper beam width	3298 mm
N	Articulation, left or right	27°

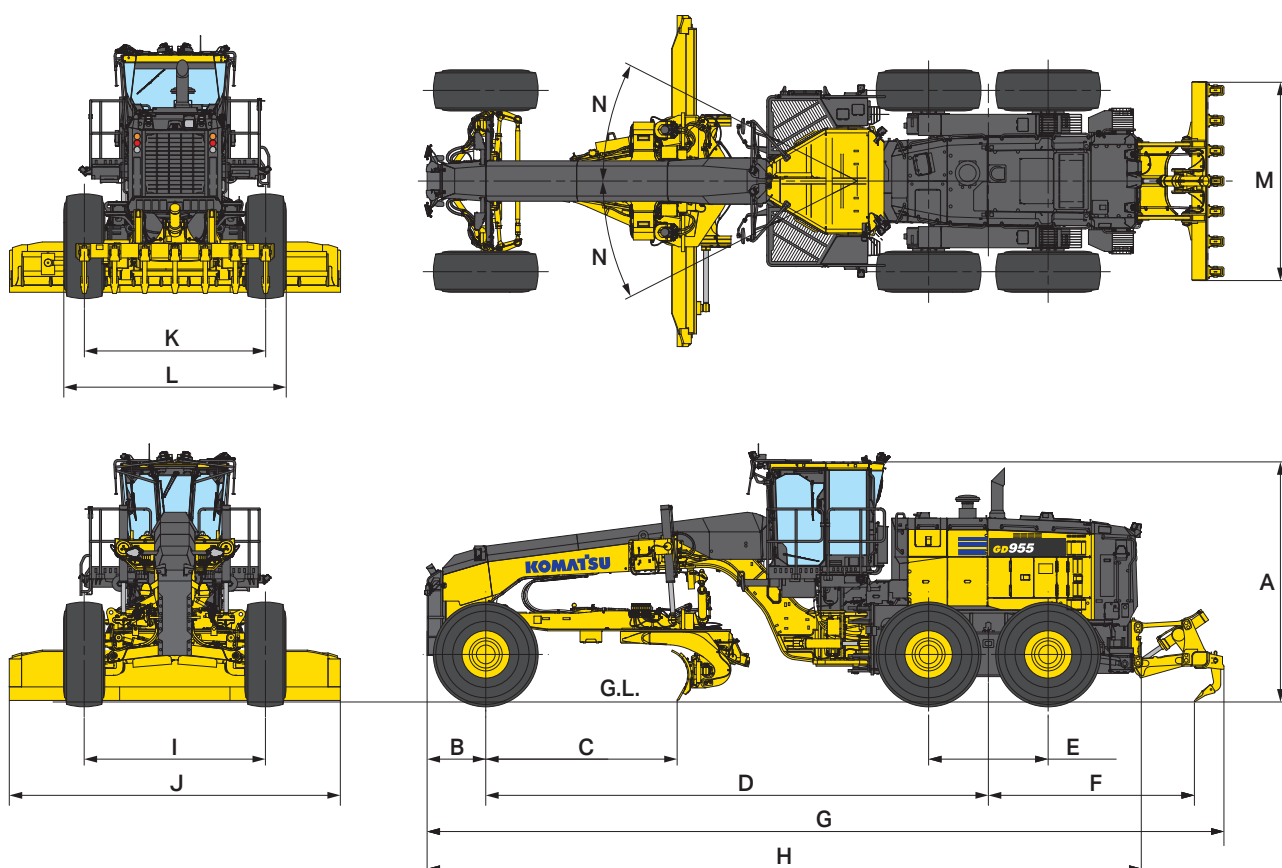

## Wheels, front and rear

Tire	Rim size	Wheel group
26.5R25	22.0	Multi-piece

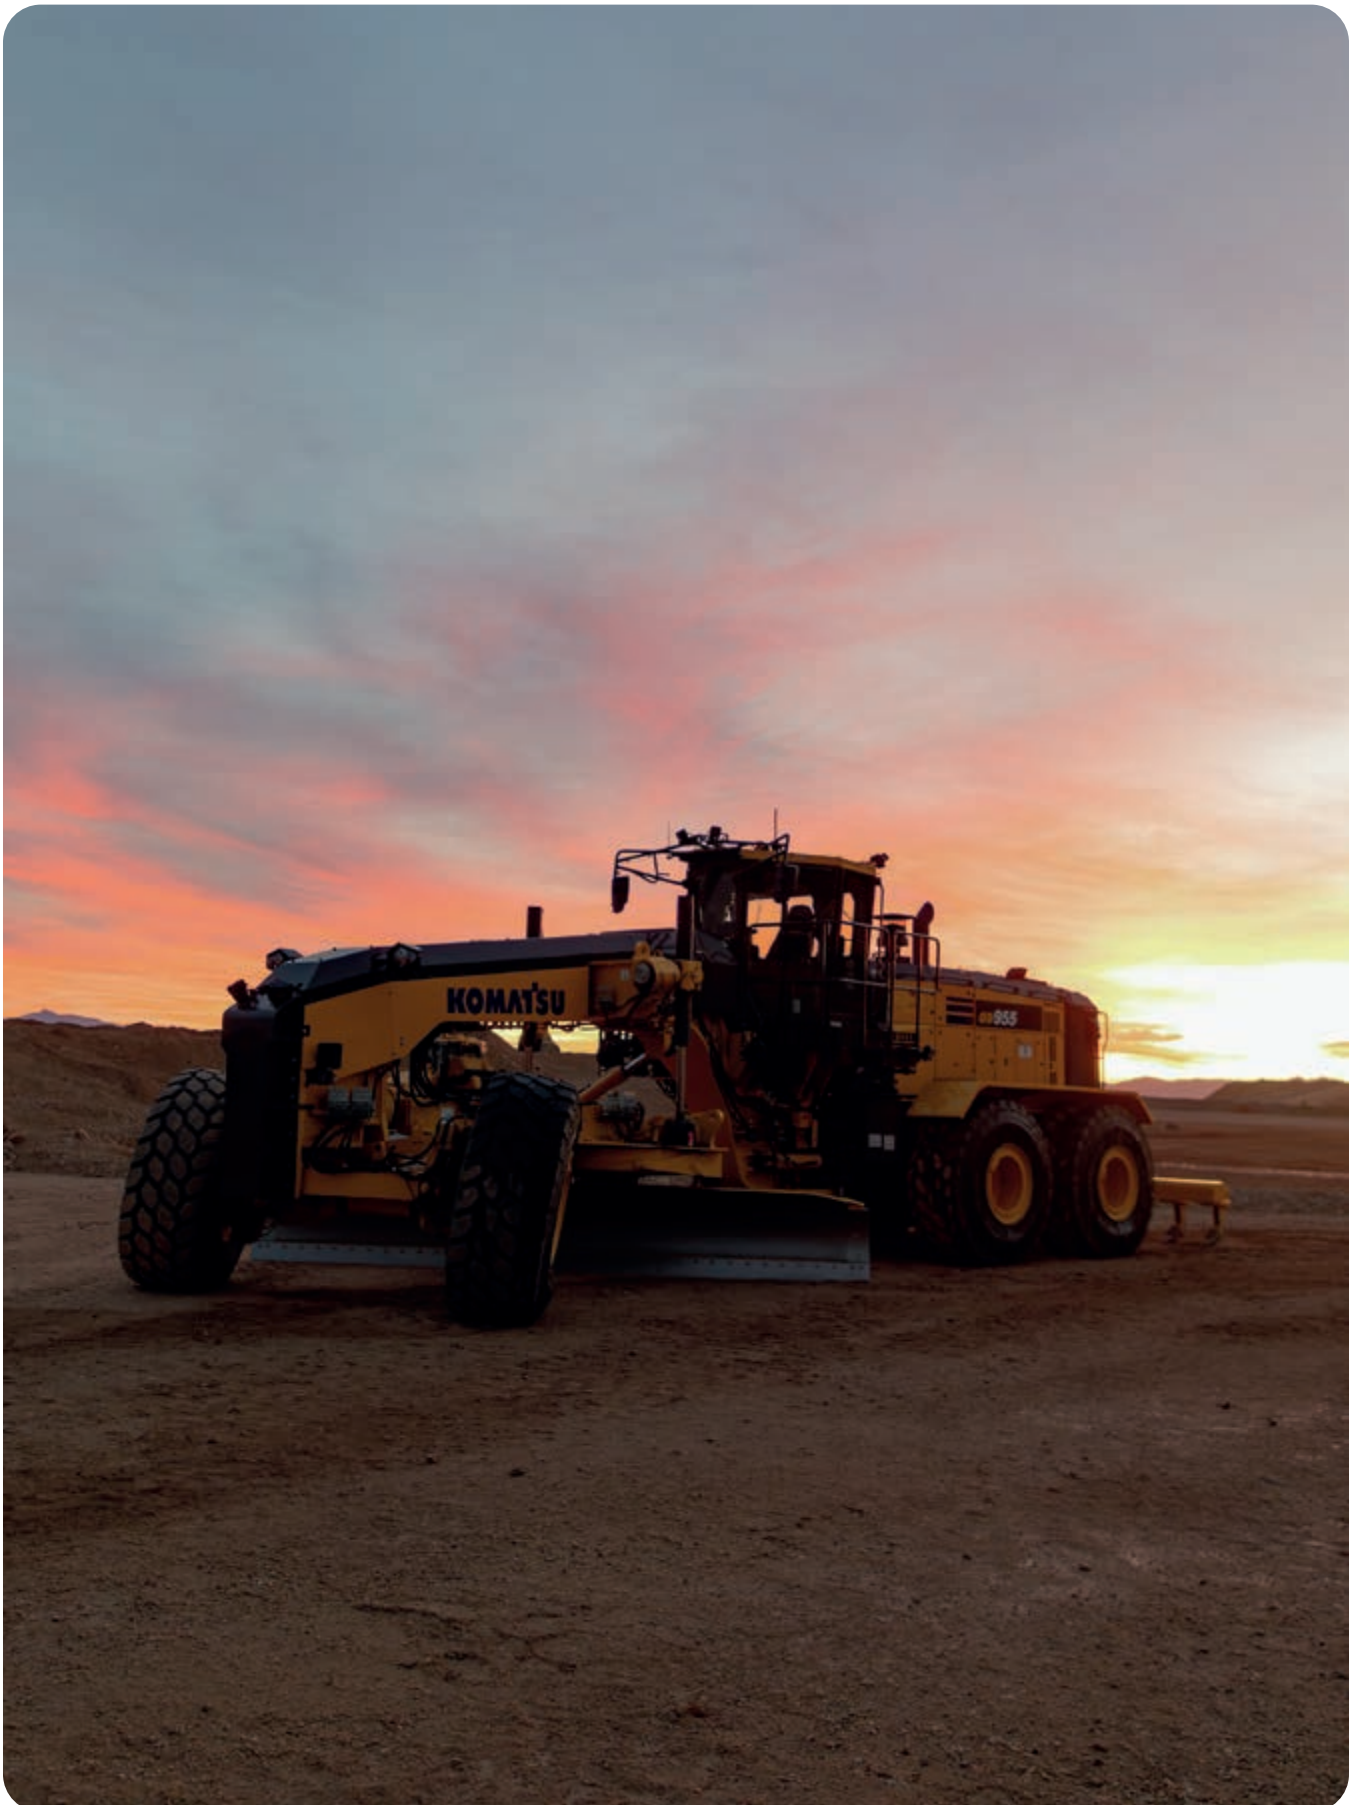



# Standard and optional equipment

## Engine

Air cleaner, double element with dust indicator	●
Alternator, 24 V / 100 A	●
Batteries, maintenance free, 2 x 12 V	●
Coolant filter	●
Electric priming fuel pump	●
Engine power mode select (Power, Economy and Middle speed)	●
Fuel line pre-filter	●
Hydraulically driven reversible cooling fan	●
Starting motor, 11.0 kW	●

## Power train

Automatic differential lock	●
Axle, rear semi floating, planetary type	●
Brake, parking, spring applied, hydraulically released wet disc	●
Differential, manual lock / unlock	●
Dual mode transmission (8F / 8R) power shift direct drive and torque converter with auto shift	●
Engine overrun warning and protection	●

## Work equipment and hydraulics

Accumulators, blade lift	●
Articulation, automatic Return-to-Center	●
Clutch, circle drive slip	●
Cutting edges, flat, 254 mm × 25 mm, 19 mm mounting bolts	●
Drawbar, bearing type circle	●
End bits, 204 mm × 19 mm, 19 mm mounting bolts	●
Rail guide with backlash adjustment bolts	●
Moldboard, hydraulic side shift and tilt, 5.5 m × 810 mm × 25 mm	●
Ripper, rear, 3 tooth	●
Moldboard, hydraulic side shift and tilt, 6.1 m × 810 mm × 25 mm	○
Tooth, ripper (1 additional, 2 additional, 4 additional)	○

## Cabin

Air conditioner (R134a) with heater	●
Cab mount, viscous	●
Defogger glass, rear	●
Doors, left and right side with wipers	●
Electrical height adjustable consoles, left and right	●
Electrical outlets (2 × 12 V outlets, 1 × 24 V outlet)	●
Floor mat	●
Instrument panel and monitoring system	●
Mirrors, interior cab, left and left exterior mirrors	●
Multi-color monitor with 7-inch LCD display	●
Operator seat with 2-point seat belt, reclining, air suspension type	●
Radio, AM / FM with aux input, Bluetooth®	●
Room lamp, LED	●
ROPS / FOPS (ISO 3471 / ISO 3449)	●
Space for lunch box	●
Steering lever, electric, palm control	●
Steering wheel, tilt and telescopic	●
USB port for charging	●
Wipers, front, doors and rear	●
Heater, 230 V	○
Mirrors, outside heated and power adjustable	○
Operator seat with 3-point seat belt, reclining, air suspension type	○
Radio, AM / FM with aux input	○

## Lighting system

Access lamps, LED	●
Back-up lamps, LED	●
Beacon lamp, LED	●
Cab mounted work lamps, LED	●
Engine bay lamp, LED	●
Front work lamps, LED	●
Head lamps, high and low beam, LED	●
Rear work lamps, LED	●
Stop and tail lamps, LED	●
Turn signal lamps, LED	●

**Safety equipment**

4 × Emergency stop switches	●
Alarm, back up	●
Anchor point for tie offs	●
Disconnect switches, battery and starting motor	●
Engine shutdown secondary switch (In cab)	●
Hammer (Emergency exit)	●
Horn, electric	●
KomVision system (With cameras and radars)	●
Operator presence monitoring system	●
Parking brake, spring applied, hydraulic release, wet disc	●
Rearview monitor and camera	●
Secondary brake (ISO 3450)	●
Secondary steering, automatic, electric	●
Service brakes, fully hydraulic wet multiple-disc	●
Fire extinguisher	○
Without KomVision	○
KomVision system (With cameras, without radar)	○
Machine lock out system (Engine coolant, engine oil, transmission oil, differential oil)	○

**Other equipment**

Auto-lube, Graco	●
Fast fill coupler for fuel tank	●
Ground level service center (engine coolant, engine oil, transmission oil, hydraulic oil)	●
In conformity with lockout tagout regulation	●
Komtrax Plus	●
KOWA sampling ports	●
Painting, Komatsu standard color scheme	●
Platform, access platform with ladders	●
Pusher plate	●
Tires and rims: 26.5R25 (L-3) with multi piece rim	●
Tool box with lock	●
Transmission under guard	●
Vandalism protection, lockable fuel tank, hydraulic tank, battery cover, engine side covers	●
Wheel chocks (2)	●
General Toolkit	○
Platform, rear entry access platform	○
Pre-cleaner, Turbo II	○
Rear fenders	○
Tires and rims: 26.5R25 (L-4) with multi piece rim	○

Further equipment on request

- standard equipment
- optional equipment

This specification sheet may contain attachments and optional equipment that are not available in your area. Please consult your local Komatsu distributor for those items you may require. Materials and specifications are subject to change without notice.

Up to 20% blended biodiesel fuel and paraffine fuel can be used. Please consult your Komatsu distributor for detailed information.

---

Your Komatsu partner:

**KOMATSU**

[komatsu.com](https://komatsu.com)